

Part 2.2:


Python: Loops, Lists, Files and Modules



Dana L Carper and Travis J Lawrence
Quantitative and Systems Biology
University of California, Merced

Python Development Environment: ATOM text editor

- Development environments provide tools to make writing code easier
 - Syntax highlighting
 - Automatic syntax enforcement
 - Intelligent autocomplete
 - Debugging
- ATOM text editor
 - Open source
 - Free
 - Easy to use and extend

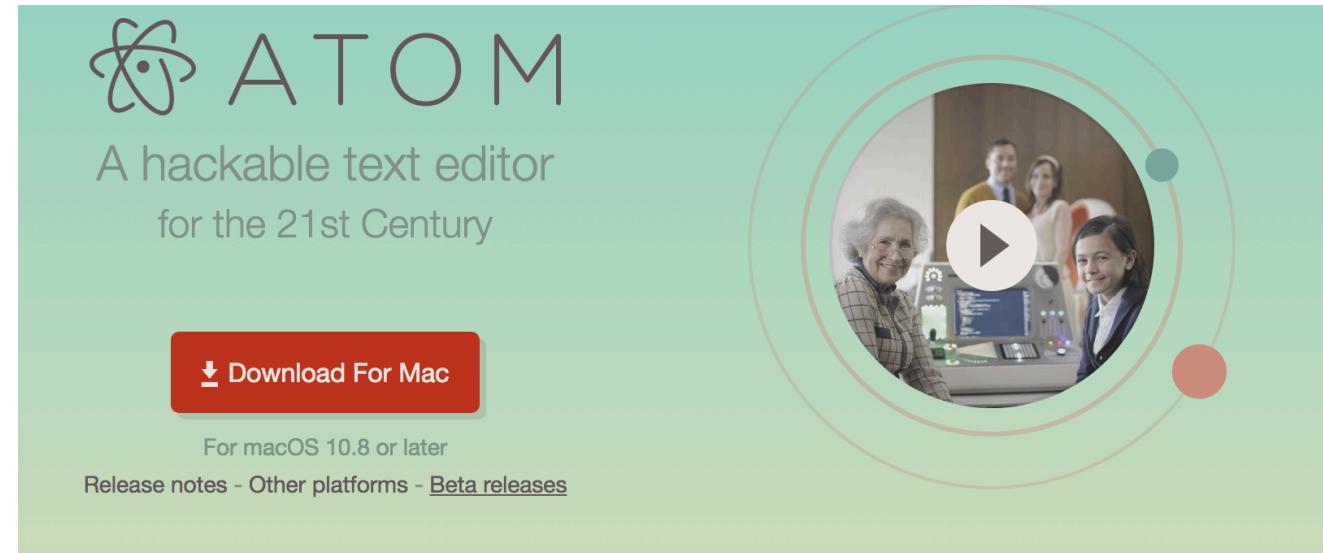

Running Python Scripts

- Python is an interpreted language
 - Code is not compiled prior to executed
 - Code is read and executed by the Python interpreter
- Example:

```
python3 script_name.py argument1 argument2
```


Running Python Scripts

- Python is an interpreted language
 - Code is not compiled prior to executed
 - Code is read and executed by the Python interpreter
- Example:


```
python3 script_name.py argument1 argument2
```



Python3 interpreter




File name of the script

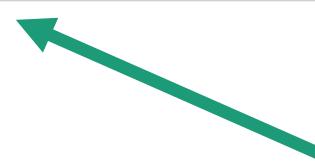

Script arguments


Data Structure: Lists

- Python lists are a sequence of Python datatypes (integers, floats, strings)

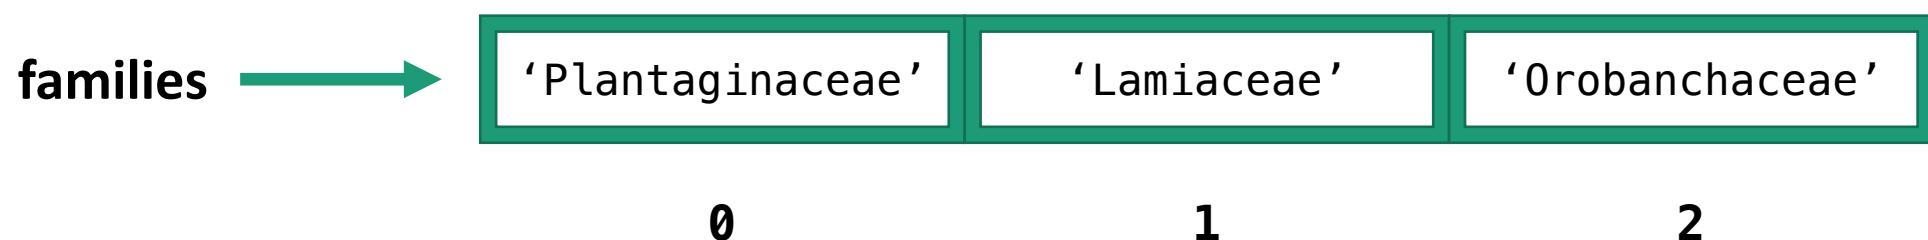

Data Structure: Lists

- Python lists are a sequence of Python datatypes (integers, floats, strings)

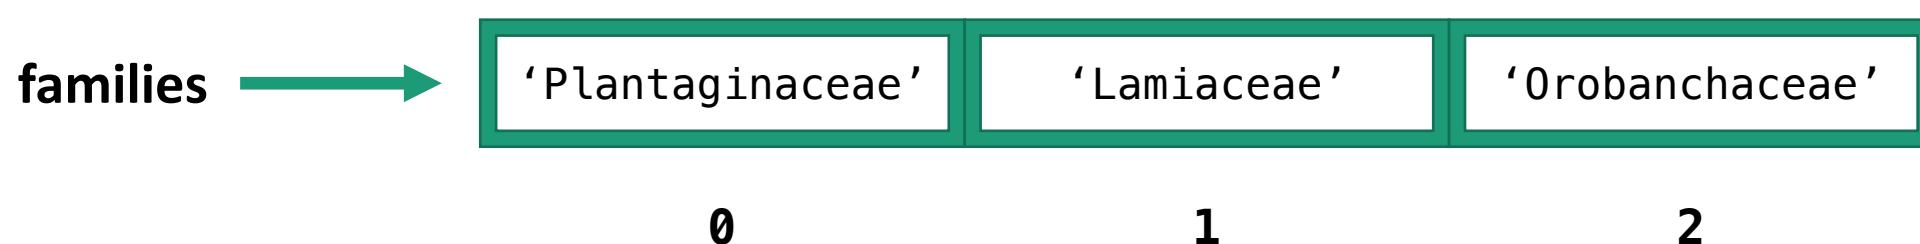

- List values are separated by commas and surrounded by square brackets
- Lists are zero indexed

```
familyes =['Plantaginaceae', 'Lamiaceae', 'Orbanchaceae']  
print(families[0]) # Plantaginaceae  
print(families[2]) # Orbanchaceae  
print(len(families)) # 3
```

Files: Reading

- Python uses the open function to access files

```
file_handle = open("filename.txt", "r")
```

Files: Reading

- Python uses the open function to access files

```
file handle = open("filename.txt", "r")
```

String indicating the file to open

Variable containing the file object

- File mode
 - r – read
 - w – write

Files: Reading

- Python uses the open function to access files

```
file handle = open("filename.txt", "r")
```

String indicating the file to open

Variable containing the file object

- File mode
 - r – read
 - w – write

- To read lines from the opened file use the readline() method on the file object

```
file_handle = open("filename.txt", "r")
line = file_handle.readline() #First line\n
line = file_handle.readline() #Second line \n
file_handle.close
```

Loops

- We often need to repeat a block of code several times
 - Reading lines from a file
 - Calculating values for each item of a list
 - Running simulations
- Programming languages have loop statements to introduce repetitions
- Python has two types of loops
 - for loops
 - while loops

Loops: for

- Python for loops are iterator based loops that step through sequences, such as, lists
- Syntax:

```
for variable in sequence:  
    statement1  
    statement2
```

Loops: for

- Python for loops are iterator based loops that step through sequences, such as, lists
- Syntax:

```
for variable in sequence:  
    statement1  
    statement2
```

for loop keyword

Loops: for

- Python for loops are iterator based loops that step through sequences, such as, lists
- Syntax:

```
for variable in sequence:  
    statement1  
    statement2
```

Variable that holds the current step of the sequence object

Loops: for

- Python for loops are iterator based loops that step through sequences, such as, lists
- Syntax:

```
for variable in sequence:  
    statement1  
    statement2
```

for loop keyword

Loops: for

- Python for loops are iterator based loops that step through sequences, such as, lists
- Syntax:


```
for variable in sequence:  
    statement1  
    statement2
```

Sequence object (e.g. list) to step through

Loops: for

- Python for loops are iterator based loops that step through sequences, such as, lists
- Syntax:

```
for variable in sequence:  
    statement1  
    statement2
```

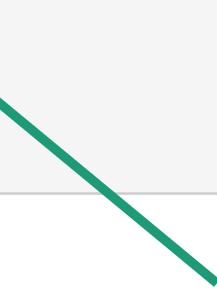

The colon indicates the start of a indented code block.

Loops: for

- Python for loops are iterator based loops that step through sequences, such as, lists
- Syntax:

```
for variable in sequence:  
    statement1  
    statement2
```

Indented code block that is executed each iteration of the loop
(four spaces are used to indent the block)

Loops: for

- Python for loops are iterator based loops that step through sequences, such as, lists
- Syntax:

```
for variable in sequence:  
    statement1  
    statement2
```

Indented code block that is executed each iteration of the loop

- Example: printing every line of a file:

```
file_handle = open("filename.txt", "r")  
for line in file_handle:  
    print(line)
```

Loops: While

- Syntax

```
while (condition is true):  
    statement1  
    statement2
```

- Commonly used for simulations.
- We will be simulating genetic drift using a Moran process

Methods and Functions

- Functions
 - Take variables as arguments and perform a task
 - Functions are not associated with particular variable type

```
print("Hi")
len([1,2,3,4,5,6])
range(5)
```

- Methods
 - Perform a task
 - Methods are associated with a variable type and used directly on the variable

```
"Hello World".split() #[ "Hello", "World" ]
[0,1,2,3,4].append(5) #[0,1,2,3,4,5]
```

Modules

- Modules contain Python code that provides additional functionality
 - NumPy – data structures and functions for fast numerical operations
 - Biopython – functions for working with sequence files


Modules

- Modules contain Python code that provides additional functionality
 - NumPy – data structures and functions for fast numerical operations
 - Biopython – functions for working with sequence files
- Obtaining modules
 - Built-in
 - Installed from software repositories
- Using modules

```
import sys
```

Modules

- Modules contain Python code that provides additional functionality
 - NumPy – data structures and functions for fast numerical operations
 - Biopython – functions for working with sequence files
- Obtaining modules
 - Built-in
 - Installed from software repositories
- Using modules

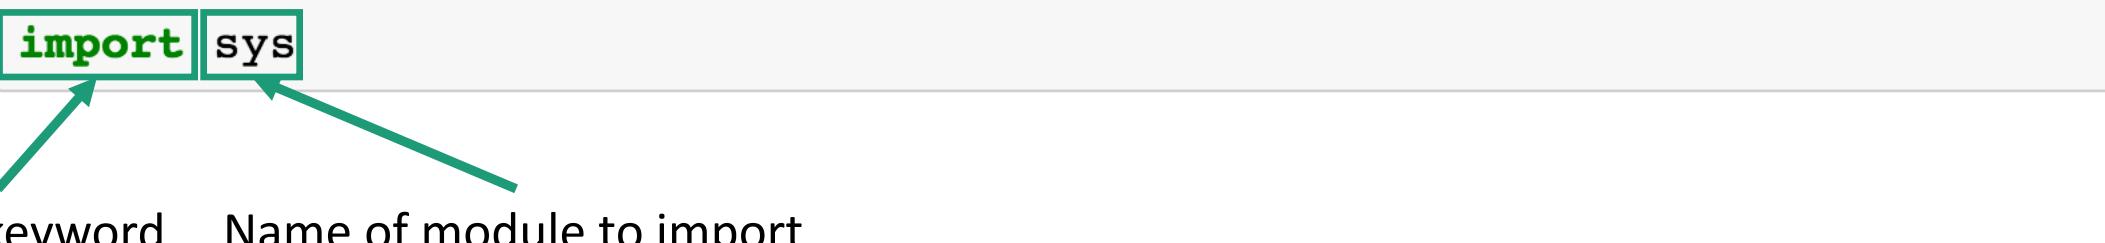

```
import sys
```

Import keyword Name of module to import

Modules: sys

- Gives access to command-line arguments through `sys.argv`
 - `sys.argv` is a list of command-line arguments including the script name
- Syntax

```
python3 script_name.py argument1 argument2
```

```
import sys
print(sys.argv[0]) #script_name
print(sys.argv[1]) #argument1
print(sys.argv[2]) #argument2
```

- Arguments are commonly used to specify files